


LiquidUI: Load Command

The load command is used to load an external file. Once the file is loaded, anything included in the file will be available for global use in WS scripts.

User Interface

Log into SAP. On the Easy Access screen, a bunch of texts display that is run from our external file “functions.sjs”.

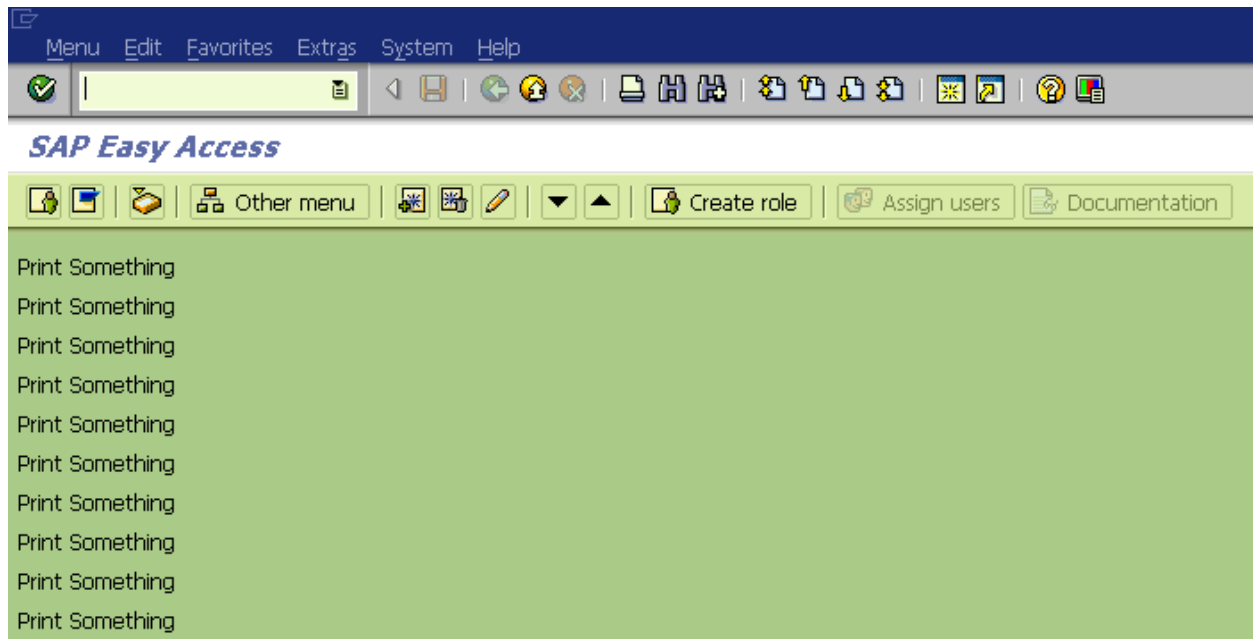

Liquid UI Code [Script]

```
1 //////////////////////////////////////////////////////////////////////////////////////////////////////////////////
2 // Author: Synactive, Inc. [1065 E. Hillsdale Blvd, Foster City, CA, 94404, USA]
3 // Email: support@guixt.com; sales@guixt.com;
4 // Contact: 650.341.3310
5 // Version: 1.0.0.0
6 //////////////////////////////////////////////////////////////////////////////////////////////////////////////////
7
8 // load the file functions.sjs
9 load("functions.sjs");
10 // clear the screen
11 del("X[IMAGE_CONTAINER]");
12 // Run the function that is defined in the other file
13 createTexts();
```

```
*C:\GuiXT\Tutorials\Forum\functions.js - Notepad++ [Administrator]
File Edit Search View Encoding Language Settings Macro Run Plugins Window ?
functions.js SAPLSMTR_NAVIGATION.ED100.js
1 ///////////////////////////////////////////////////////////////////////////////////////////////////////////////////////////////////
2 // Author: Synactive, Inc. [1065 E. Hillsdale Blvd, Foster City, CA, 94404, USA]
3 // Email: support@guixt.com; sales@guixt.com;
4 // Contact: 650.341.3310
5 // Version: 1.0.0.0
6 ///////////////////////////////////////////////////////////////////////////////////////////////////////////////////////////////////
7
8 // a function to create
9 function createTexts()
10 {
11     println("in here");
12     for(var i=0; i<10; i++){
13         text([0+i,0], "Print Something");
14     }
15 }
```